


STYLE: AF-5200

Mild and less severe applications are always there but why go for traditional and costly gasket sheets? We design an economic combination of HIGH QUALITY Aramid fibers and Inorganic fibers bonded with NBR. Recommended for mild services in piping installation applications, work with mild steam, hydrocarbons and refrigerants.

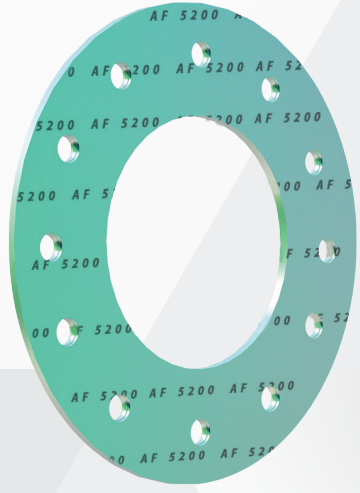

Color	Green, Branded
Fiber:	Aramid/Inorganic
Binder:	Nitrile (NBR)
Fluid Service:	Steam, Water, Oils, Dilute Acids & Alkalies Solvents, Refrigerants.
Density:	1.7 g/cm ³
Tensile Strength ASTM F 152:	1500 psi (11.3Mpa)
Change in Tensile, ASTM F-152	30% Max
Compressibility ASTM F 36:	8 to 19%
Recovery ASTM F 36:	45%
Temperature	
Range:	-100 to 662°F (-73 to 350°C)
Max. Continuous :	413°F (212°C)
Max. Pressure:	870 psig (60 bar)
Fluid Resistance-ASTM F146 IRM 903 Oil, 5h/300°F (150°C)	
Thickness increase:	0 to 15%
Weight increase:	15%

STYLE: AF-5200

ASTM Fuel B 5h/70°F (21°C)	
Thickness Increase:	0 to 10%
Weight increase:	12%
Sealability	
ASTM F 37 (Fuel A):	0.03ml/hr
ASTM F37 (Nitrogen):	0.5 ml/hr
Dielectric Breakdown ASTM D 149:	11kV/mm (279V/mil)
DIN 3535 Gas Permeability:	0.05cc/min
Creep relaxation ASTM F 38:	20%
Flexibility ASTM F1 47:	10x
Gasket Factors of Araflex-AF-5200	

THICKNESS	1/16"	1/8"
m factor	3	3.2
σ psi (Mpa)	3347 (23.08)	3385 (23.34)

Note:

ASTM properties based on 1/16" sheet thickness except ASTM F38, which is based on 1/32" sheet thickness. This is a general guide only and should not be the sole means of accepting or rejecting this material. The data listed here falls within the normal range of product properties but should not be used to establish specification limits nor used alone as the basis of design.

AraflexWarning: Araflex gasket materials should never be recommended when both the temperature and the pressure are at the maximums listed. Properties and applications shown are typical. No application should be undertaken by anyone without independent study and evaluation for suitability. Never use more than one gasket in one flange joint, and never reuse a gasket. Improper use or gasket selection could cause property damage and/or serious personal injury. The data reported is a compilation of field testing, field service reports and/or in-house testing. While the utmost care has gone into publishing the information contained herein, we assume no responsibility for errors. The information and specifications contained in this website are subject to change without notice. This revision cancels and obsoletes all previous editions.

